

MONTAŽNA KUTIJA JE NAPUNJENA POTREBNOM
KOLIČINOM GELA KOJI NE MENJA SVOJSTVO.



Predstavnik za Srbiju, Makedoniju i Crnu Goru:

EL-CO

Backa Palanka

Trg Oslobođenja br.8

Tel. +381 21 / 751-174, 6044-218, 754-650, 754-649

e-mail: el-co@nadlanu.com

[http:// www.el-co.rs](http://www.el-co.rs)



ETELEC S.p.A.

Via D.De Roberto, 44-80143 Naples - Italy

tel. +39 081 5846610 Fax: +39 081 2587166

e-mail: etelec@etelec.it

[http:// www.etelec.it](http://www.etelec.it)

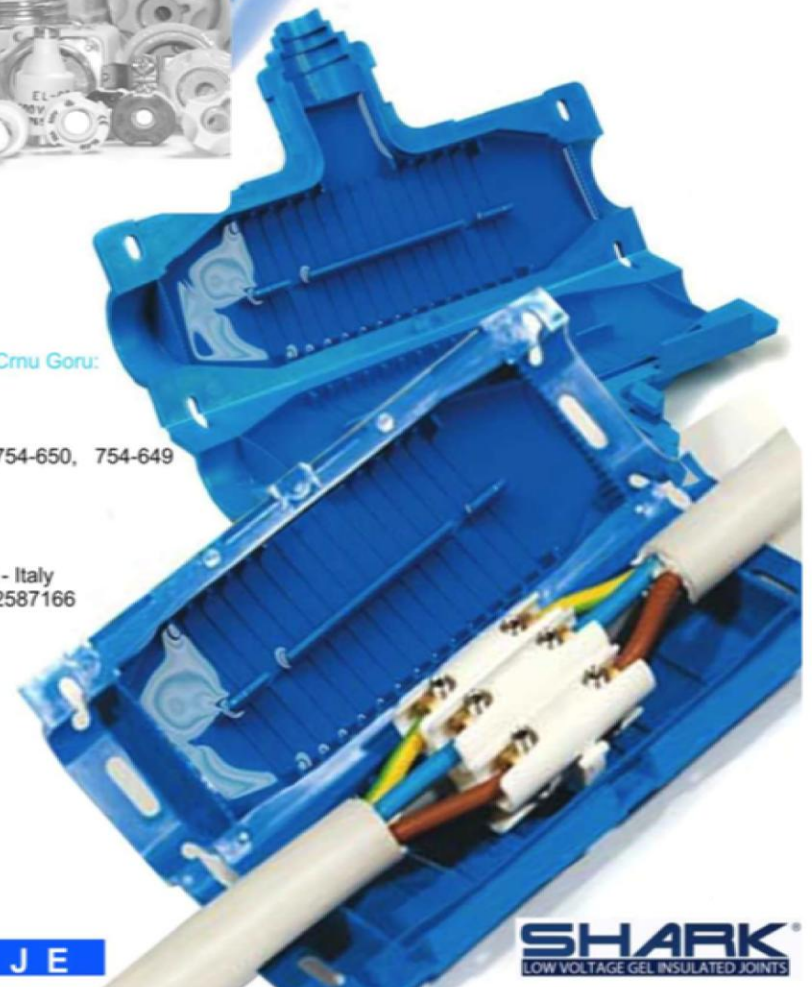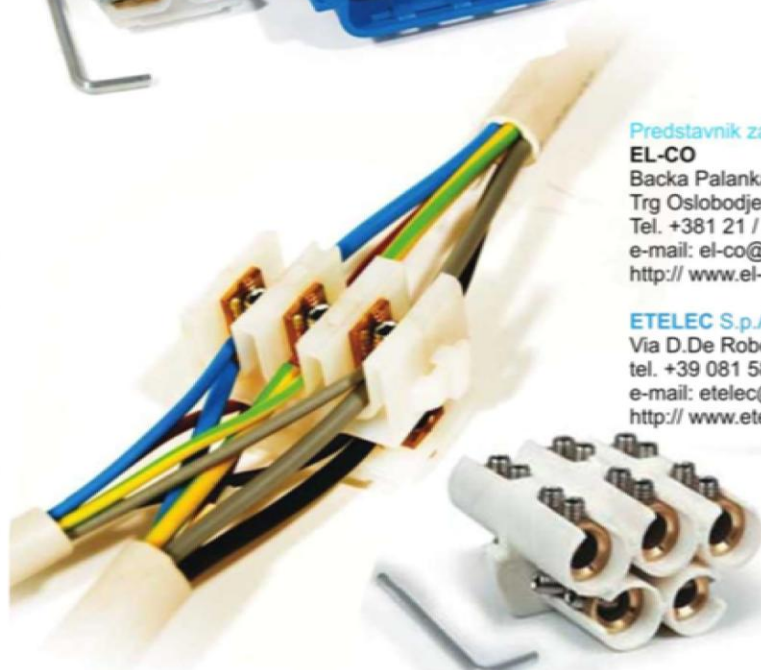

NAŠA IDEJA

VAŠE REŠENJE

SHARK
LOW VOLTAGE GEL INSULATED JOINTS




RAVNO SPAJANJE

SPAJANJE GRANANJEM

SHARK 125-150
CLASSIC LINE



NEW



RAVNO SPAJANJE JEDNOŽILNOG KABLA

SHARK 406/S - 410/S - 416/S
CLASSIC LINE



RAVNO SPAJANJE ČETVOROŽILNOG KABLA

SHARK 506 - 516
SERIES 500



NEW



RAVNO SPAJANJE PETOŽILNOG KABLA

SHARK 150Y
SERIES 500




NEW



ELEMENTI ZA GRANANJE KABLA
POD UGLOM 30 STEPENI




SHARK 125 - 150
CLASSIC LINE



ELEMENTI ZA PARELELNO
GRANANJE KABLA

NEW

SHARK 516Y - 535Y
SERIES 500



ELEMENTI ZA GRANANJE VIŠEŽILNOG
KABLA POD UGLOM 30 STEPENI



SHARK 406 - 410 - 416
CLASSIC LINE



MULTIŽILNO PARELELNO GRANANJE
KABLOVA DO 4 ŽILE

SHARK 425 - 435
SERIES 400



VIŠEŽILNO GRANANJE
KABLA PO 90 STEPENI

Tehničke karakteristike

u saglasnosti sa standardom CEI EN 50393 (IMQ odobren sertifikat CA01-00297, CA01-00298).

Samogasivost u saglasnosti sa EN60695-2-11, niska emisija dima i gasova u saglasnosti sa standardom CEI-20-37/2-1 i CEI 20-37/7.

U saglasnosti sa Directive Rohs 2002/95/CE (ograničenje upotrebe određenih opasnih materija u elektro uređajima i sastavnim delovima).

mesingani mehanički konektor sadrže modeli SHARK 125 i SHARK 150 operativni opseg temperature: -20°C do + 90 °C

ICE 505 (zaštita od vode do jedan metar visine)